

X-Joint CJ1 Series


Anodized aluminum santoprene® construction joint

40920112

Product Description

X-Joint CJ1 series are used for construction joints in order to avoid cracking of final floor finish (tiles, marbles, etc). They are manufactured from anodized aluminium, stainless steel or brass. With a santoprene joint strip, bonded using a high performance modified acrylic adhesive bond in a long term temperature resistance of 100C.

They are suitable for internal and external applications.

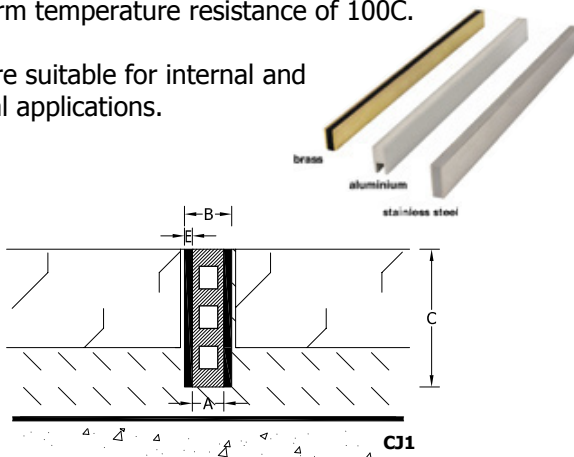

CJ1 Series

Type	A	B	C	E	Movement
CJ1 14/5	5	9	14	2	±2
CJ1 14/8	8	12	14	2	±2
CJ1 20/5	5	9	20	2	±2
CJ1 20/8	8	12	20	2	±2
CJ1 30/8	8	12	30	2	±2
CJ1 40/8	8	12	40	2	±2
CJ1 50/8	8	12	50	2	±2
CJ1 50/10	10	14	75	2	±2
CJ1 75/8	8	12	75	2	±2
CJ1 80/10	10	14	80	2	±2

All dimensions are in mm

Material

Santoprene joint strip in grey, beige or black and anodized 6063 aluminium strip. Stainless steel and brass available upon request. Custom size can be produced upon request.

Installation Guidelines

X-Calibur provides detailed method statements on all its products for use in various applications. These must be referred to prior to starting work.

Wherever possible install the expansion joint module at the mid-point temperature at which will be the joint will be operated.

It is essential that the joint is installed perfectly level.

Health and Safety

This product is for industrial use only by trained operatives. It is not considered hazardous if used correctly.

Authorized Technical Specialist

Please note that only X-Calibur Authorized Technical Support Specialists ('ATSS') are permitted to change any of the information in this data sheet or to provide written recommendations concerning the use of this product. Visit www.x-calibur.us for a full list of X-Calibur ATSS.

Datasheet Validity

X-Calibur makes modifications to its product datasheets on a continuous basis. Please check the datasheet update section on www.x-calibur.us to ensure you have the latest version.

Warranties

X-Calibur supplies products they comply with the properties shown on the current datasheets. In the unlikely event that products supplied are proved not to comply with these properties, then we will replace the non-compliant product or refund the purchase price. X-Calibur does not warrant or guarantee the installation of the products as it does not have control over the installation or end use of the products. Any suspected defects must be reported to X-Calibur in writing within five working days of being detected. X-Calibur Construction Systems Inc. makes no warranty as to merchantability or fitness for a particular purpose and this warranty is in lieu of all other warranties express or implied. X-Calibur Construction Systems Inc. shall not be liable for damages of any sort including consequential damages, down time, or delay.

* Santoprene is the registered trademark of Exxon Mobil Chemicals.

