


# X-Joint CWJ2 Series

Extruded anodized aluminum joint covers for wall & ceilings

401070114

## Product Description

X-Joint CWJ2 Series are extruded anodized aluminium expansion joint covers with integrated weather seal used to cover the exterior and interior joints on walls and ceilings. It is available in striated or smooth finish.

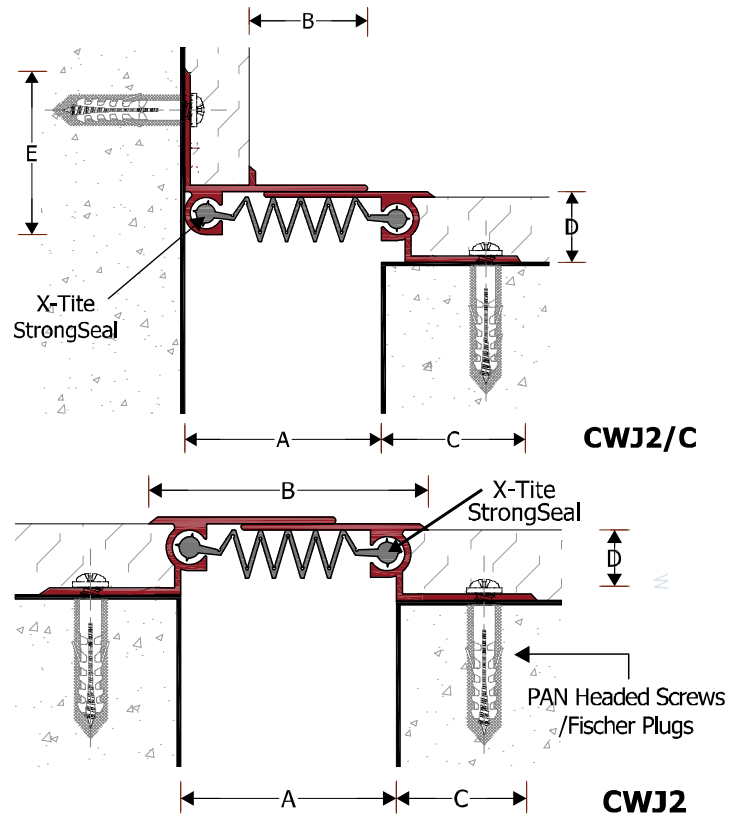

Type	A	B	C	D	E	Total Movement*
<b>Flat Profile</b>						
CWJ2 25	25	43	30	18	-	50
CWJ2 50	50	64	30	18	-	60
CWJ2 75	75	90	30	18	-	95
CWJ2 100	100	114	30	18	-	152
CWJ2 125	125	140	30	18	-	185
CWJ2 150	150	165	30	18	-	170
<b>Corner Profile</b>						
CWJ2/C 25	25	30	30	18	41	50
CWJ2/C 50	50	47	30	18	41	60
CWJ2/C 75	75	66	30	18	41	95
CWJ2/C 100	100	91	30	18	41	152
CWJ2/C 125	125	116	30	18	41	185
CWJ2/C 150	150	145	30	18	41	170

\*Movements do not take into consideration PVC elongation at break (ISO R 527)

Dimensions in mm

---

## Material

Anodized aluminum T6/6063

Can also be supply in mill finish aluminum/powder coated finish aluminium.

## Packaging

All the profiles are supplied as standard 3m long modules. Custom lengths can be produced to order.

## Installation Guidelines

X-Calibur provides detailed method statements on all its products for use in various applications. These must be referred to prior to starting work.

Wherever possible install the expansion joint module at the mid-point temperature at which will be the joint will be operated.

It is essential that the joint is installed perfectly level and is well anchored in order to perform correctly.

## Health and Safety

**This product is for industrial use only by trained operatives. It is not considered hazardous if used correctly.**

## Authorized Technical Specialist

Please note that only X-Calibur Authorized Technical Support Specialists ('ATSS') are permitted to change any of the information in this data sheet or to provide written recommendations concerning the use of this product. Visit [www.x-calibur.us](http://www.x-calibur.us) for a full list of X-Calibur ATSSs.

## Datasheet Validity

X-Calibur makes modifications to its product datasheets on a continuous basis. Please check the datasheet update section on [www.x-calibur.us](http://www.x-calibur.us) to ensure you have the latest version.

## Warranties

X-Calibur supplies products they comply with the Properties shown on the current datasheets. In the unlikely event that products supplied are proved not to comply with these properties, then we will replace the non-compliant product or refund the purchase price. X-Calibur does not warrant or guarantee the installation of the products as it does not have control over the installation or end use of the products. Any suspected defects must be reported to X-Calibur in writing within five working days of being detected. X-Calibur Construction Chemistry Inc. **makes no warranty as to merchantability or fitness for a particular purpose and this warranty is in lieu of all other warranties express or implied.** X-Calibur Construction Chemistry Inc. shall not be liable for damages of any sort including remote or consequential damages, down time, or delay.